

OXWORKS SPECIFICATION SHEETS

HERCULES ALUMINIUM SECURITY FENCING




TOP BRACKET




BOTTOM BRACKET

SINGLE LUG **BRACKET ASSEMBLY**




IN GROUND POST DETAIL

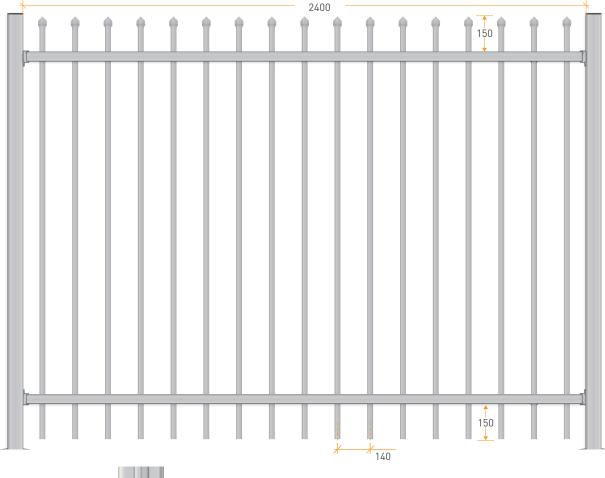



TIMBER

BASE PLATE 100 x 135mm



FLANGED (ON SLAB/TIMBER) POST DETAIL



CRIMPED SPEAR TOP DETAIL

OXWORKS

ALUMINIUM PANELS

40 x 40 x 2.0mm SHS Rails 25 x 25 x 1.6mm SHS Tube with Crimped Spear Top

140mm Tube Centres

- 2400 x 1500mm Aluminium Panel
- 2400 x 1800mm Aluminium Panel
- 2400 x 2100mm Aluminium Panel

PANEL FIXINGS

40 x 40mm Single Lug Fence Brackets

• 3 x 12-14*20 Self Tapping Tek Screws used per Single Lug Fence Bracket

40 x 40mm Double Lug Fence Brackets Side Fit Security Bracket

• 5 x 12-14*20 Self Tapping Tek Screws used per Double Lug Fence Bracket

65 x 65 x 2.5mm ALUMINIUM POSTS

In Ground Post Sizes:

• 2100mm; 2400mm; 2700mm, 3000mm; Per Metre

Aluminium Post + Base Plate Heights:

- 1300mm; 1600mm; 1900mm; 2200mm
- In Ground Post 200 x 500/600mm Post Hole filled with Post Mix Concrete
- Flanged Post On Slab M10 Stainless Steel Rod & Nut; Chemset Chemical Anchor
- Flanged Post On Timber M10 x 75mm Stainless Steel Batten Screw into structural timber

SUBSTRATE

6063 T6 Aluminium

All of our Hercules Security Fencing are available in the Interpon Powder Coating Satin Black

TITLE: ALUMINIUM HERCULES SECURITY FENCING


CONTACT: sales@oxworks.com.au

oxworks.com.au 1300 336 237




SPECIFICATION SHEETS

HERCULES STEEL SECURITY FENCING




TOP BRACKET




BOTTOM BRACKET

SINGLE LUG **BRACKET ASSEMBLY**



IN GROUND POST DETAIL

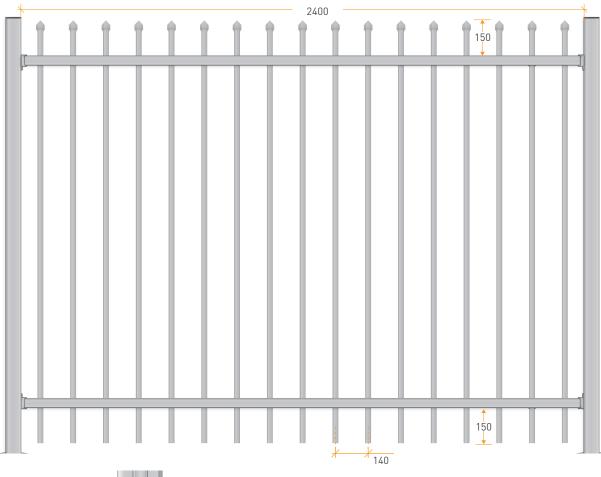



TIMBER

BASE PLATE

150 x 150mm 14mm HOLES



FLANGED (ON SLAB/TIMBER) POST DETAIL



CRIMPED SPEAR TOP DETAIL

OXWORKS

STEEL PANELS

40 x 40 x 1.6mm SHS Rails

25 x 25 x 1.2mm SHS Tube with Crimped Spear Top

140mm Tube Centres

- 2400 x 1500mm Steel Panel
- 2400 x 1800mm Steel Panel
- 2400 x 2100mm Steel Panel
- 2100 x 2400mm Steel Panel

PANEL FIXINGS

40 x 40mm Single Lug Fence Brackets

• 3 x 12-14*20 Self Tapping Tek Screws used per Single Lug Fence Bracket

40 x 40mm Double Lug Fence Brackets Side Fit Security Bracket

• 5 x 12-14*20 Self Tapping Tek Screws used per Double Lug Fence Bracket

65 x 65 x 2.5mm STEEL POSTS

In Ground Post Sizes:

• 2100mm; 2400mm; 2700mm, 3000mm; Per Metre

Steel Post + Base Plate Heights:

- 1300mm; 1600mm; 1900mm; 2200mm: 2500mm
- In Ground Post 200 x 500/600mm Post Hole filled with Post Mix Concrete
- Flanged Post On Slab M10 Stainless Steel Rod & Nut; Chemset Chemical Anchor
- Flanged Post On Timber M10 x 75mm Stainless Steel Batten Screw into structural timber

SUBSTRATE

Galvanised Steel

All of our Hercules Security Fencing are available in the Interpon Powder Coating Satin Black.

TITLE: STEEL HERCULES **SECURITY FENCING**

CONTACT: sales@oxworks.com.au

oxworks.com.au 1300 336 237

